



Q-Semi Complex Application Data Form

Date: _____ Required (*)
*Distributor Name: _____
*Contact: _____
*Location: _____
*Phone Number: _____
Fax: _____
E-mail: _____
Lantech Model Recommended: _____
Options Recommended: _____
*Customer Name: _____
*Contact: _____
*Address: _____
*Phone Number: _____
Fax: _____
E-mail: _____

My Product Load

What product(s) are you wrapping?

How are they packaged?

- Carton, Bags, Bottles, Cans, Roll Products, Trays, Pails, Other


Is there any additional information about the product or package important to this application?

- Slippery, Sharp Edges, Crushable, Loose Parts, Protruding Components, Corner/End caps, Other

If window wrapper, what is depth? _____ Frame Material _____

Overall Load and Pallet Dimension (inches):

Table with 6 columns: Load Only (in.) Length, Width, Pallet Only (in.) Length, Width, Load Height (include pallet), Weight*

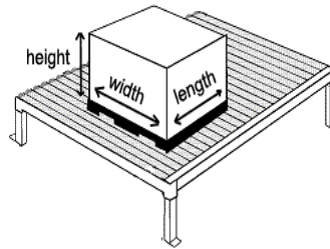

For QXT-Plus:

Maximum Load Sizes:

- L= length in flow direction, W= width, L=44" or less, then W=50" max, L=45" then W=48" max, L=46" then W=47" max, L=47" then W=45" max, L=48" then W=44" max

Minimum Load Sizes:

- Std load on conveyor: L=40"x30"x30", Turntable load option L=30"x30"x30"

Load will be conveyed on:

*If load greater than 2500 lbs, call Lantech (QXT-Plus only)

- Pallet, Slipsheet, No substrate, Pallet Type (if known):, Postal Pallet, Pallet and Slipsheet, Other

Do you need to wrap load to pallet? Yes No Height of Pallet/Skid Only (inches):

Bottom boards on pallets will be (For QXT-Plus or Gravity turntable top):



Perpendicular with conveyor rollers



Parallel with conveyor rollers - if parallel, list number of bottom boards Width of each board:

How many loads do you need to wrap per hour? Typical LPH Peak LPH Hours/Day Days/Week Weeks/Year

My Load Handling Method

Loading method – fork truck or pallet jack? _____ Do you need a ramp? (Not available for QXT-Plus) _____

The Q-XT Plus is designed to be a stand alone system (not inline with other powered conveyor) and loaded/unloaded by a fork truck. Is your load stable enough to be handled by a fork truck or rotated on a stretch wrapper? Yes No

Do you need film to overlap top of load? – If yes, how much _____(inches)

Do you need to leave the pallet unwrapped? Yes No

Do you have loads that overhang more than 1"? Yes No


Do you have loads with inboard condition that are inboard 2" or more? Yes No

Do you have wing pallets? Yes No


Do you have loads that are round? Yes No

Model Configuration (QXT-Plus Only)

Please select the model configuration:

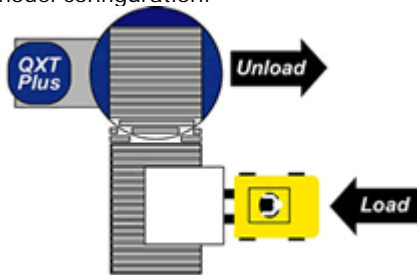

Load on the conveyor (standard machine)

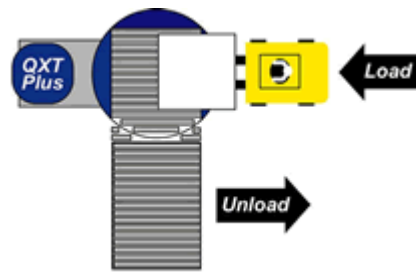

Load on the turntable (option)

My Environment

What is the temperature range this machine will need to operate in? Min. _____°F Max. _____°F

Do you ever wash down this area, or handle liquid products that may spill on the machine? Yes No Splash Only

Will this machine need to operate in a dusty or dirty environment? Yes No

Will this machine be subject to corrosive or abrasive materials like sand, concrete blocks, cement, fertilizer, citric acid, solvents or salt? (Note: Any machine placed in these environments reduces the warranty on the machine to 30 days.) Yes No

Will this machine need to operate in an explosive environment? Yes No

Overhead clearance where machine will be located (height from floor to ceiling) _____ Ft.

Other System Requirements

Pre-Stretch Required: 200% (Std. On Q-Series) Other _____ (Gears can be ordered in 25% increments from 125%-300%)

Note: Cold Package freezer package option comes standard with reduced gears.

Film Size: 20" 30"

One manual on CD is provided as standard with the QXT-Plus. If a hard copy is required instead, please check here: Hard Copy Required
Additional manuals are available in both formats.

Is test product available if needed: Yes No

Other equipment that will be operated with the Q-Semi Complex (i.e. scale, labeler, etc.): _____

Additional Information: _____

Check Options that apply:

Load on the turntable

220 Volt

1 – 15 RPM

- Scale (under conveyor only)
- 30 inch Roll Carriage
- Nema 12
- Lighted e-stop

- Extended Mast
- Cold Package (20° F)
- Power Roller-Stretch Plus
- Shipping Organizer

- Static collection brush
- Lexan plastic cover over membrane control panel
- Extra gravity conveyor: 1 2
(Only available with purchase of load on turntable option)

Environment:

Special Note* -

Options only available on certain models

Please Check Go Configure

- Wash down

- Cold Package
- Freezer Package

Plant temperature ____°F

Plant temperature ____°F

Freezer packages standard 125% pre-stretch gears and cold packages standard 150% pre-stretch gears.

Please specify any other special instructions:
