



# ERGO-MATIC™

## TRANSPORTABLE DRUM HANDLERS



*Lift,  
transport  
and palletize:*

- *Plastic Drums*
- *Fibre Drums*
- *Steel Drums*



***Because You can't Afford to Drop a Drum!***



**SAFE**



**DEPENDABLE**



**ERGONOMICALLY**



*Compact profile for tight work spaces*



*Perfect for placing drums on/off wooden pallets... and spill containment pallets*



*All models available with optional Steel-It™ coating*



*Units available for double stacking drums!*



*All Ergo-Matic models can be ordered with spark resistant jaws and anti-static cushioned belt cradle*

**LIFTOMATIC**

Liftomatic, Inc.

1-800-837-6540

**AVOID UNNECESSARY INJURIES AND PRODUCT**

**EFFICIENT**



**EASY TO USE**



**OPERATOR FRIENDLY**



*Custom equipment  
made to your  
specifications.  
Call your  
Liftomatic  
representative for  
details.*

**A safe and effective family of portable drum handling products that can be used by any of your operators. Introducing the all-new Ergo-Matic® line of drum handling devices from Liftomatic. Capable of lifting, lowering and transporting any steel, plastic or fiber drum, the new Ergo-Matic's safely lift drums weighing up to 1000 pounds to a height of 38" off the floor! A variety of models, options and configurations are available to suit your application.**




*Visit the parrot  
on the internet:  
[www.liftomatic.com](http://www.liftomatic.com)*

*Optional Pallet Carousel.  
See Ergo-Matic Selection Chart on back  
for details*



*Safety floor lock standard on all units*

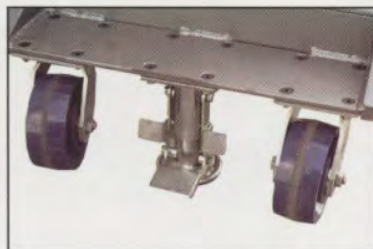

*Exclusive "Parrot-Beak"® clamp assembly*

**LOSS. STOP MANHANDLING DRUMS TODAY.**

## ERGOMATIC MODEL SELECTION CHART

MODEL	APPLICATION	DIMENSIONS (L x W x H)	WEIGHT
Ergo1000	Standard Ergo-Matic, with 600lb. and 1000lb. capacity settings. Recommended for handling all open top and closed head steel drums. Also handles occasional fiber or plastic drum.	1000lb - 36.5" x 42.5" x 48" 600lb - 33.5 x 36.5 x 48	360lb.
Ergo1000-BC	Standard Ergo-Matic, 1000lb. capacity; includes cushioned belt cradle to protect sidewall of drum during lifting/lowering and transport.	36.5 x 42.5 x 48	360lb.
Ergo1000-SRJ-BC	Standard Ergo-Matic, 1000lb. capacity; includes spark-resistant parrot-beak <sup>®</sup> jaws and anti-static cushioned belt cradle. Recommended for use in low flash-point, flammable or intrinsically safe areas.	36.5 x 42.5 x 48	360lb.
Ergo1000-DH-BC	Ergo-Matic, 1000lb. capacity; includes double clamp parrot-beak assembly, providing double gripping action on drum chime. Also includes cushioned belt cradle; recommended in areas where steel, fiber and plastic drums are all regularly handled.	36.5 x 42.5 x 48	370lb.
Ergo1000-DH-SRJ-BC	Ergo-Matic, 1000lb. capacity; includes double clamping parrot-beak spark-resistant jaws and anti-static belt cradle. Recommended in low flash-point, flammable, or intrinsically safe areas where a mix of steel, fiber and plastic drums are regularly handled.	36.5 x 42.5 x 48	370lb.
Ergo HR800	High rise Ergo-Matic with 800lb. capacity; unit can raise drum 38" from floor height. Recommended for staging drums at higher levels, placing on pick-up truck beds, delivery vans, racking and similar applications.	36.5 x 42.5 x 65	380lb.
Ergo HR800-BC	High rise Ergo-Matic, 800lb. capacity; equipped with protective belt cradle to cushion drum sidewall during lifting/lowering and transport.	36.5 x 42.5 x 65	380lb.
Ergo HR800-SRJ-BC	High rise Ergo-Matic, 800lb. capacity; equipped with spark-resistant jaws, anti-static belt cradle. Recommended for low flash-point, flammable and intrinsically safe areas.	36.5 x 42.5 x 65	380lb.
Ergo HR800-DH-BC	High rise Ergo-Matic, 800lb. capacity; equipped with double clamp parrot-beak jaw assembly and protective belt cradle. Recommended when handling a variety of steel, fiber and/or plastic drums.	36.5 x 42.5 x 65	390lb.
Ergo HR800-DH-SRJ-BC	High rise Ergo-Matic, 800lb. capacity; equipped with double clamp parrot-beak assembly with spark-resistant jaws and anti-static belt cradle. Recommended for areas handling a variety of steel, plastic and fiber drums, in low flash-point, flammable or intrinsically safe environments.	36.5 x 42.5 x 65	390lb.

### OPTIONAL FEATURES:

#### PROTECTIVE COATINGS:

All Ergo-Matic models can be coated with "Steel-It<sup>™</sup>" protective coating. This is highly recommended for corrosive environments and/or in food-grade applications. Ask your Liftomatic representative for details.

#### SPECIAL MATERIALS:

The Ergo-Matic can be supplied with stainless steel components to satisfy FDA requirements for handling devices. Ask your Liftomatic representative for details.

#### OPTIONAL WHEELS:

Ergo-Matic wheels are available in a variety of sizes and materials. Ask your Liftomatic representative for more details.

#### PALLET CAROUSEL:

The Pallet-Carousel can be ordered in 2000lb., 4000lb. or 6000lb. capacity. It is designed to be placed under a pallet load of drums so that an operator can safely lift and lower drums from the pallet, working from one position only; eliminating the need (and space!) to move around all corners of the pallet being loaded/unloaded. Ask your Liftomatic representative for more details.

#### CUSTOM UNITS:

Should your operation require a specific design not shown here, ask your Liftomatic representative for engineering assistance.

Parrot-Beak<sup>®</sup> is a registered trademark of Liftomatic, Inc. Evanston, IL

Steel-It<sup>™</sup> is a registered trademark of Stainless Steel Coatings, Inc., S. Lancaster, MA



www.liftomatic.com

Tel: 1-800-837-6540

Fax: 847-325-2959