

iFORKS Economy

Completely wireless fork scale with basic functions

BENEFITS

- Basic functions, best buy in the business
- 5 Minutes installation
- Completely wireless: no cabling
- Digital calibration
- Bluetooth signal transfer
- Fork LED's indicate battery status
- Tested 1,000,000 cycles at 125% of capacity

Best price

Plug & weigh



RAVAS ECONOMY LINE

RAVAS

FUNCTIONS

- Automatic and manual zero correction
- Gross/net weighing
- Automatic tare and manual tare weight entry
- Totalling with sequence number
- Data output for printing
- Power management user menu
- Internal clock for date and time
- Error messages in display
- Auto shut-off function for optimal battery life
- Overload protection 200%


STANDARD SPECIFICATIONS

- Capacity 2.500 kg, FEM 2A
- Graduation 2 kg steps from 0 - 2.500 kg
- System tolerance 0.2% of the scale capacity
- Display LCD, digit height 18 mm, adjustable backlight
- Signal transfer Bluetooth, class 1
- Controls 4 function keys, on/off key
- Protection class IP65 / NEMA 4

POWER SUPPLY

- Easily exchangeable, ergonomic and robust battery pack on each fork, containing 4 rechargeable C-cells. A charger is included.
- Indicator powered by 4 AA-batteries
- The system has an auto shut-off function for optimal battery life
- The operator can customize the power settings in the 'Power Management' menu on the indicator

DIMENSIONS IN MM

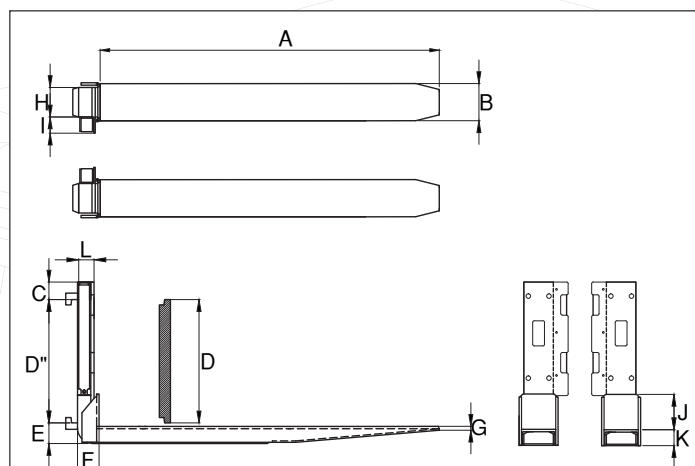

FEM2A 2500 kg*

A Fork length	1150
B Fork width	133
C Height above carriage	68
D Height carriage	407
D" Distance claws	418
E Fork drop** A/B	76/152
F Distance between carriage and stop plate	80
G Thickness of fork tip	15
H Width of fork base	100
I Width of battery pack	55
J Height of stop plate	90
K Fork height	58
L Thickness fork	59
Weight, per fork	67 kg

Tolerance +/- 2 mm

* Capacity specified at load centre point 500 mm

** Specify fork drop type upon order, tolerance dimension +/- 5 mm

OPTIONS*

- Thermal (6V) printer
- Extra set of rechargeable fork battery packs
- Rechargeable AA-batteries for the iForks indicator
- FEM 2B forks
- Indicator on adjustable RAM support

* The use of options may change related specifications

RAVAS Europe B.V.

P.O. Box 2023, NL-5300 CA Zaltbommel, The Netherlands
T. +31 (0)418 51 52 20, F. +31 (0)418 51 53 20
backoffice@ravas.com, www.ravas.com

RAVAS



ISO 9001:2008
ISO 14001:2004
www.ravas.com
ID 000037200