

# RAVAS-1


Pallet truck load indication system

## BENEFITS

- Attractively priced entry model
- Virtually indestructible
- Water tight: for use onboard lorries
- Standard fork dimensions

Top quality

Great value for money

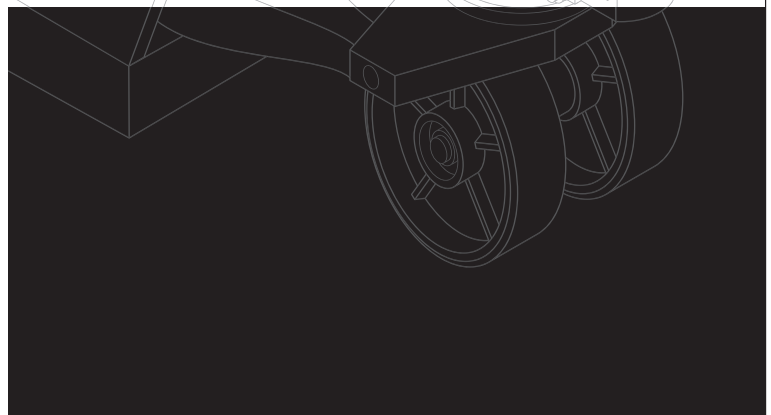

**RAVAS**


## FUNCTIONS

- Manual zero correction
- Totalling with sequence number
- Lifting height indication in display
- Only zero setting and weighing on reference height
- Error messages in display
- Automatic switch-off

## STANDARD SPECIFICATIONS

- Weighing capacity 2,200 kg
- Graduation 5 kg
- Tolerance 0.8% of full scale
- Display LCD
- Keypad 2 function keys
- Protection class IP65
- Steering wheels rubber
- Loading wheels polyurethane, single
- Colour red (RAL 3000), epoxy painted
- Own weight 58 kg
- Power supply 2 AA-batteries
- Battery life 3,000 on/off weighing cycles of 3 minutes: automatic switch-off after 2 minutes
- Pump quick lift

## DIMENSIONS IN MM



|                                       |      |
|---------------------------------------|------|
| <b>A</b> Fork length                  | 1150 |
| <b>B</b> Fork width                   | 150  |
| <b>C</b> Minimum fork height          | 83   |
| Minimum space between floor and forks | 30   |
| <b>D</b> Maximum fork height          | 205  |
| Lifting height                        | 122  |
| <b>E</b> Width over forks             | 520  |
| <b>F</b> Height to top indicator      | 495  |



## PREMIUM OPTIONS\*

- Tandem loading wheels in polyurethane
- Footbrake

\* The use of options may change related specifications.

## RAVAS UK Ltd

Office 130, 5 High Street  
Maidenhead, Berkshire, GB-SL6 1JN, United Kingdom  
T. +44 (0)1628 67 35 24, F. +44 (0)1628 67 08 78  
info.uk@ravas.com, www.ravas.co.uk

# RAVAS